

- Evaporator Coil with Copper Pipes and blue fins
- Stainless Steel Housing
- Electrical Heater Available
- Pipe Inlet on Top Housing





CSL

2.0 5.0 kW

Conditions	CSL	CSL22	CSL33	CSL44	CSL54
Capacity Kw @ 7KTD -25°C SST	R22	2.27	3.99	4.53	4.91
	R134A	2.16	3.82	4.33	4.70
	R404A	2.40	4.20	4.76	5.20
	R449A	2.37	4.15	4.79	5.14
Specifications	CSL	CSL22	CSL33	CSL44	CSL54
Air Throw	m	10	12	13	13
Air Flow	m³/h	2,720	4,080	5,440	5,440
Fan Motor/ Ø300mm 220VAC/50Hz	No.	2	3	4	4
	Watts	180	270	360	360
	Amps	0.84	1.26	1.68	1.68
Coil	Fin spacing (mm)	7	7	7	7
Connection	Liq Inlet	3/8"	3/8"	1/2"	1/2"
	Suc Outlet	3/4"	3/4"	7/8"	7/8"
	Drain	3/4"	3/4"	3/4"	3/4"
Defrost	Watts	1,700	2,900	4,000	4,000
Dimensions	W	787	1,143	1,499	1,804
	L	1,045	1,401	1,757	2,062
	H	430	430	430	430
	D	305	305	305	305
Net Weight	Kg	34	46	53	59

Dimension

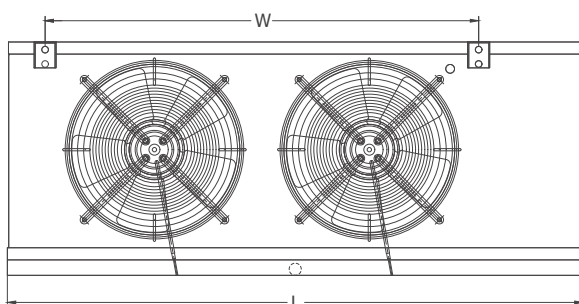

Capacity Correction

CSL @ °C SST	
-17°C	1.06
-25°C	1.00
-32°C	0.97

Unit Coolers

CS Series





- Evaporator Coil with Copper Pipes and blue fins
- Stainless Steel Housing
- Electrical Heater Available
- Pipe Inlet on Top Housing

CSM

3.0 10.0 kW

Conditions	CSM	CSM22	CSM33	CSM44	CSM55	CSM65
Capacity Kw @ 7KTD -7°C SST	R22	3.16	4.71	7.18	9.01	9.35
	R134A	3.01	4.47	6.83	8.58	8.88
	R404A	3.24	4.84	7.40	9.26	10.23
	R449A	3.26	4.85	7.43	9.29	10.26
Specifications	CSM	CSM22	CSM33	CSM44	CSM55	CSM65
Air Throw	m	10	12	13	15	15
Air Flow	m³/h	2,720	4,080	5,440	6,800	6,800
Fan Motor/ Ø300mm 220VAC/50Hz	No.	2	3	4	5	5
	Watts	180	270	360	450	450
	Amps	0.84	1.26	1.68	2.10	2.10
Coil	Fin spacing (mm)	6.35	6.35	6.35	6.35	6.35
Connection	Liq Inlet	3/8"	3/8"	1/2"	1/2"	1/2"
	Suc Outlet	3/4"	3/4"	7/8"	7/8"	7/8"
	Drain	3/4"	3/4"	3/4"	3/4"	3/4"
Defrost	Watts	900	1,600	2,800	3,000	3,000
Dimensions	W	787	1,143	1,499	1,855	1,855
	L	1,045	1,401	1,757	2,113	2,113
	H	430	430	430	430	430
	D	305	305	305	305	305
Net Weight	Kg	36	45	60	63	66

Dimension

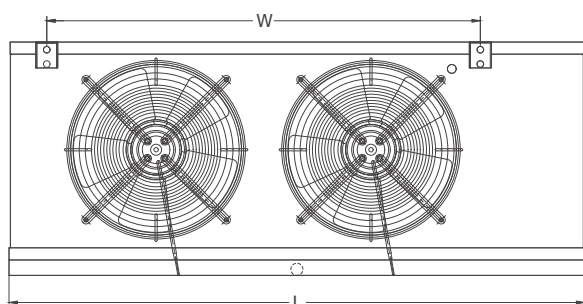

Capacity Correction CSM @ °C SST	
3°C	1.14
-2°C	1.06
-7°C	1.00
-12°C	0.92